



# ALTERRA PRO LARGE HYBRID WOOD INSERT

**NEW**  
i3000  
Model

[regency-fire.com](http://regency-fire.com)

## Introducing Our Newest Wood Insert:

Welcome to the world of warmth, elegance, and unparalleled craftsmanship. Designed to transform your fireplace into a captivating focal point, the i3000 blends timeless beauty with modern functionality, offering the perfect balance of form and function.



*Unmatched Versatility: Whether you prefer a classic aesthetic or a sleek, contemporary look, our wood insert is designed to complement any style of décor. With a variety of finishes and designs to choose from, you can easily customize your insert to suit your personal taste.*

### CHOOSE YOUR LOOK



**SURROUND**  
(PREMIUM OR TRADITIONAL)

**FACEPLATE**  
(CONTEMPORARY, CLASSIC OR ARCHED)

**DOOR STYLE**  
(CONTEMPORARY OR CLASSIC)

*The surround slips over the faceplate.*

### PREMIUM FEATURES



*Edge to Edge  
Frameless Glass Door*



*Smooth  
Contemporary Refractory  
Panels (included)*



*Door is Flush  
With Faceplate*

### FRONT OPTIONS



*Contemporary Faceplate*



*Oversize Contemporary  
Faceplate*



*Classic Faceplate*



*Oversize Classic Faceplate*



*Arched Faceplate*


### PREMIUM SURROUNDS\*



*Black*



*White*



*Sunset Bronze*



*Grey*




*Brushed Nickel*

### TRADITIONAL SURROUNDS\*



*Black*



*Brushed Antique Copper*

### CUSTOM FACEPLATE



*Custom 3-sided Faceplate*

*\*NOTE: Surrounds will reduce your minimum fireplace opening size. Refer to manual for more information. Premium or Traditional Surrounds can only be used with Contemporary or Classic Faceplates*



i3000R shown with Oversize Contemporary Faceplate



i3000R - shown with Contemporary Faceplate and Brushed Nickel Premium Surround



i3000A - shown with Classic Faceplate and Brushed Antique Copper Traditional Surround



i3000A - shown with Arched Faceplate

# i3000 WOOD INSERT

## FEATURES

- Removable flue collar, wheels and leveling bolts assist with quicker installation
- Adjustable door latch ensures a tight door seal over time
- Front mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge log retainer, which will develop a beautiful patina with use, keeps logs in their place
- Triple-burn technology creates longer and more complete burns
- Backed by the industry's most comprehensive Limited Lifetime Warranty
- 10-year, 100% coverage on original metal catalyst
- Qualifies for U.S. Biomass Tax Credit

## OPTIONS

- Concealed temperature sensitive variable speed blower
- Regular, oversize or custom faceplate options
- Premium or Traditional surrounds
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits




SPECIFICATIONS	
Maximum BTU*	85,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	84% LHV / 78% HHV
Max Log Size	20"

MINIMUM FIREPLACE OPENING			
	With Faceplate	With Faceplate + Premium Surround	With Faceplate + Traditional Surround
Width (Front)	32"	32"	30.5"
Height	24"	24"	24"
Depth	21"	19.5"	19"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.  
 \* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.  
 \*\* Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

# SPECIFICATIONS

## DIMENSIONS

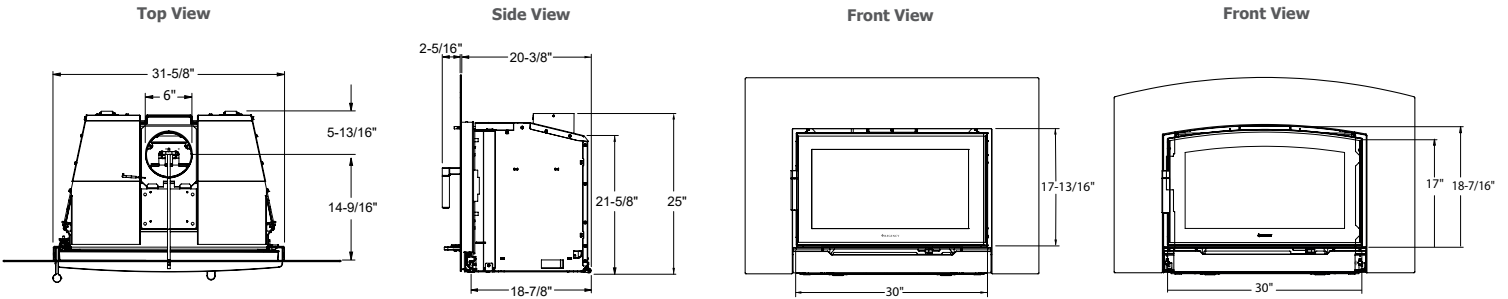


DIMENSIONS	i3000R	i3000A
Contemporary Faceplate (W x H)	45-3/4" x 31"	--
Oversize Contemporary Faceplate (W x H)	50-1/4" x 33-1/4"	--
Classic Faceplate (W x H)	--	46-1/8" x 31"
Oversize Classic Faceplate (W x H)	--	50-1/4" x 33-1/4"
Arched Faceplate (W x H)*	--	46-1/8" x 31"
Premium Surrounds (W x H)**	31-1/8"H x 46-3/4"W	31-1/8"H x 46-3/4"W
Traditional Surrounds (W x H)**	51-3/4" x 33-7/8"	51-3/4" x 33-7/8"

\*Note: Height to top of arch. Height to side of arch is 28"

\*\*Note: Premium or Traditional Surrounds can only be used with contemporary or Classic Faceplates

## MASONRY FIREPLACE CLEARANCES

Note: Shown with rectangular door. Arch door clearances are exactly the same.

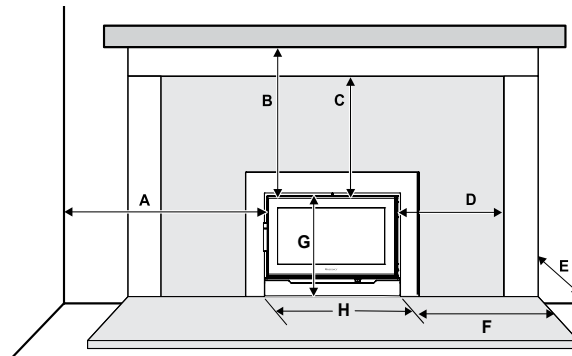

## MASONRY FIREPLACE CLEARANCES

The minimum required clearances to combustible materials when installed into a masonry fireplace are listed below for 3" mantel:

UNITS	ADJACENT SIDE WALL TO SIDE OF DOOR	MANTEL** (TO TOP OF UNIT)	TOP FACING (TO TOP OF UNIT)	SIDE FACING* (TO SIDE OF DOOR)	MIN. HEARTH EXTENSION		MINIMUM HEARTH SIDE EXTENSION	TO TOP OF UNIT (REFERENCE DIMENSION ONLY)	FROM SIDE OF DOOR (REFERENCE DIMENSION ONLY)
	A	B	C	D	E (USA)	E (CANADA)	F	G	H
i3000	15-1/2" (394 mm)	15" (381 mm)	13-3/4" (349 mm)	11-3/4" (298 mm)	16" (406 mm)	18" (457 mm)	8" (203 mm)	23-1/2" (597 mm) To top	30" (762 mm)

\* Measured from side of door

\*\* NOTE: Refer to manual for any mantel greater than 3" up to a maximum of 12"