



TRADITIONAL GAS FIREPLACES



regency-fire.com

WHY CHOOSE REGENCY?

For the past 40+ years Regency has been focused on creating innovative, high-quality, and reliable products that reduce heating costs and add true value to your home. We design all our products to be durable and last a lifetime so that our customers can enjoy them for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line over 40 years ago to today. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's *more* than a fireplace!



TABLE OF CONTENTS

Regency Grandview™ Gas Fireplaces	
G1200P	06
G800P	08
G800EC, G800C, G600EC, G600C	10
 Regency Bellavista® Gas Fireplaces	
B36XTCE, B41XTCE	12
 Regency Panorama® Gas Fireplaces	
P36, P36E, P36D	14
P33, P33E, P33CE	16
 Regency Excalibur® Gas Fireplace	
P90E	18
 Design Choices & Options	20
 Specifications	24





THE GRANDVIEW SERIES

G800P shown with birch log set, herringbone brick panels in black and clean finish install.

One Fireplace, Unlimited Possibilities


Ignite your imagination with the Regency Grandview™ traditional gas fireplace, offering over 960 design combinations and versatile installation options. Choose a classic setup or opt for our Regency Patented Cool Wall System, which allows safe mounting of art or a TV above the unit while reducing costs and enabling the use of nearly any material right to the edge. With endless styling possibilities and innovative features, the Grandview™ series brings your vision to life with unmatched flexibility.

COOL WALL SYSTEM ADVANTAGES

- Place a TV above the fireplace without it getting damaged
- Hang artwork without fear of warping
- Paint will not discolor, drywall will not crack
- No internal fans required
- Use any finish right to the edge of the fire, even wood or wallpaper

OPTIONS & ACCESSORIES FOR GRANDVIEW


CHOOSE YOUR LOOK

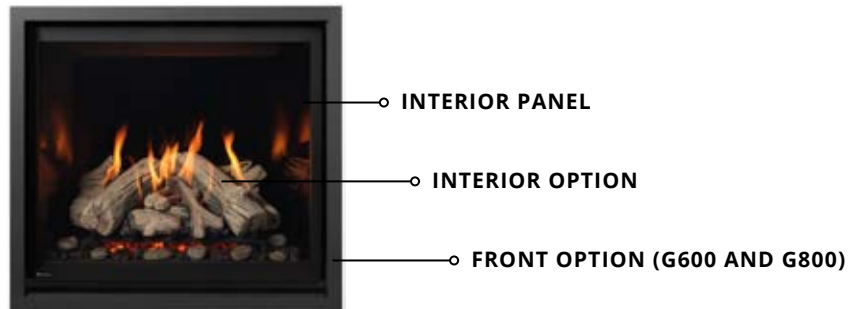

MULTIPLE INTERIOR PANELS



Rustic Brown
Brick Panels




Herringbone - Black
Brick Panels



Herringbone - Rustic
Brown Brick Panels



Volcanic Black
Brick Panels



Painted Black
Steel Panels



Black Enamel or Black
Glass Reflective Panels

MULTIPLE INTERIOR OPTIONS



Birch Log Set



Oak Log Set



Driftwood Log Set

Available for G600 & G800 Series Only



Crushed Glass -
Ginger



Crushed Glass -
Coal Black



Crushed Glass -
Iceberg



Volcanic Stones

MULTIPLE FRONT OPTIONS (Available for G600 & G800 Series Only)



Clean Front
Finishing Trim



Outside
Finishing Trim



Faceplate

FACEPLATE AVAILABLE IN THREE COLORS:



Black



Brushed Nickel



Antique Copper

REGENCY GRANDVIEW™ G1200P

Extra Large Premium Gas Fireplace



G1200P shown with Oak log set and herringbone brick panels in rustic brown.



Oak log set with herringbone brick panels



Birch logs with volcanic black brick panels



Driftwood logs, volcanic stones and reflective black glass panels

EXTRA LARGE FLAME PICTURE

Introducing the Regency Grandview™ G1200P — our biggest and most innovative Grandview gas fireplace yet. With cutting-edge Infusion Burner Technology, an impressive panoramic viewing area, and a versatile range of accessories, the G1200P is designed to deliver the ultimate in style, performance, and personalization.

SPECIFICATIONS	NATURAL GAS	PROPANE
Max. Input (BTU)	53,000	53,000
Turn down to (BTU)	13,500	13,500
Efficiency (steady state)	72.58%	74.08%
EnerGuide Rating (Canada only)	66.58%	67.96%

DIMENSIONS	
Viewing Area	1200 sq. in.
Width	55"
Height	42-3/4"
Depth	28-7/8"



G1200P shown with Birch logs and volcanic black brick panels.

STANDARD FEATURES

- NEW innovative split flow infusion burner that creates the most realistic flame package
- Largest viewing area in its class
- Standard top down and ember-bed lighting
- Integrated Invisimesh safety screen
- Cool Wall system to allow for flexible finishing options
- Flame height adjustment control
- Electronic ignition with Proflame II GTMF remote control
- Natural gas or propane
- Limited lifetime warranty

OPTIONS

- Multiple log set choices: oak, birch or driftwood
- Interior panels in Rustic Brown, Volcanic Black, and Herringbone
- Finishing trims for easy finishing around the fireplace
- Inner reflective black enamel panels
- Inner painted black steel panels
- Variable speed blower (Non-combustible finishing install only)
- Chase vent (cool wall installations)
- Outdoor Installation kit
- Propane conversion kit
- Power vent kit
- Wi-Fi Kit provides the ultimate fireplace control from your smart phone

REGENCY GRANDVIEW™ G800P

Medium Premium Gas Fireplace



G800P shown with Oak log set, rustic brown brick panels and clean finish install.



Birch log set with herringbone brick panels in black



Oak log set with reflective glass black panels



Oak log set, rustic brown brick panels and four sided faceplate in black

PERSONALIZED WARMTH

Transform your living space with the Regency Grandview™ G800P — the perfect blend of style, comfort, and personalization. With its expansive view, customizable accessories, and beautifully crafted flame, this fireplace creates a cozy, welcoming atmosphere that feels uniquely yours.

SPECIFICATIONS	NATURAL GAS	PROPANE
Max. Input (BTU)	36,000	34,000
Turn down to (BTU)	19,500	27,000
Efficiency (steady state)	65.20%	68.16%
EnerGuide Rating (Canada only)	58.73%	58.89%

DIMENSIONS	
Viewing Area	800 sq. in.
Width	35-7/8"
Height	33-7/8"
Depth	18-5/8"



G800P shown with Driftwood log set, reflective glass black panels and four sided black faceplate. Installed on a covered patio using the outdoor installation kit.

STANDARD FEATURES

- NEW patent pending infusion burner that creates the most realistic flame package
- Clean front design
- Standard top down and ember-bed lighting
- Integrated Invismesh safety screen
- Ceramic glass
- Flame height adjustment control
- Proflame II GTMF remote control
- Electronic ignition
- Natural gas
- Limited lifetime warranty

OPTIONS

- Cool Wall system to allow for any finishing material right to the edge of the fireplace
- Brick panels in a variety of colors and designs
- Inner reflective black enamel panels
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower
- Chase vent (cool wall installations)
- Outdoor Installation kit
- Propane conversion kit
- Power vent kit
- AstroCap® venting system
- Wi-Fi Kit

REGENCY GRANDVIEW™

G800EC • G800C • G600EC • G600C

Medium & Small Gas Fireplaces



Oak log set and rustic brown brick panels



Oak log set and black enamel reflective panels



Birch log set, herringbone brick panels and black faceplate

REFINED AMBIANCE

Select your breathtaking flame picture and accessories to craft a truly unique fireplace. With our patented Cool Wall technology, create the perfect look for your home with our pick and choose accessory options.

SPECIFICATIONS	G800EC		G800C		G600EC		G600C	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	27,000	25,500	27,000	26,500	21,000	20,500	21,000	20,500
Turn down to (BTU)	15,000	21,000	15,000	14,500	11,500	16,500	11,500	11,000
Efficiency (steady state)	65.20%	68.16%	61.12%	63.62%	71.17%	72.80%	71.18%	72.71%
EnerGuide Rating (Canada only)	55.96%	57.74%	55.96%	55.03%	64.80%	67.22%	64.79%	66.76%

DIMENSIONS	VIEWING AREA	WIDTH	HEIGHT	DEPTH
G800 series	800 sq. in.	35-7/8"	33-7/8"	16-7/8"
G600 series	600 sq. in.	31-7/8"	29-7/8"	14-5/8"



G600C shown with coal black crushed glass and painted black steel panels installed with a clean front finish using the cool wall system and chase vent.



Ginger crushed glass and antique copper faceplate



Iceberg crushed glass, volcanic stones and brushed nickel faceplate



Driftwood log set and black steel panels

STANDARD FEATURES

- Clean front design
- Top down and ember-bed lighting (G800EC, G600EC)
- Integrated safety screen
- Ceramic glass
- Flame height adjustment control
- Standing Pilot (Direct Spark Ignition - G800C, G600C)
- Proflame II GTMF remote control (G800EC, G600EC)
- Electronic ignition (G800EC, G600EC)
- Rear or top vent for versatile installations
- Natural gas
- Limited lifetime warranty

OPTIONS

- Choose from a log grate and traditional style log package or contemporary crystal tray
- Cool Wall system to allow for any finishing material right to the edge of the fireplace
- Brick panels in a variety of colors and designs
- Inner reflective black enamel panels
- Inner painted black steel panels
- Surrounds in various colors
- Finishing trims for easy finishing around the fireplace
- Variable speed blower
- Chase vent (cool wall installations)
- Outdoor Installation kit
- Propane conversion kit
- ON/OFF remote control (G800C, G600C)
- AstroCap® venting system
- Heat Wave™ power duct kit (G800C, G800EC)

REGENCY BELLAVISTA® B36XTCE • B41XTCE

Medium & Large Gas Fireplaces



B36XTCE shown with rustic brown brick panels and integrated safety screen.

BOLD STYLE

The Bellavista® series combines bold style with reliable performance. Its flush fit design and edge-to-edge trim options create a clean, modern look. Built with premium craftsmanship, this fireplace offers easy customization with a variety of accessories—making it a perfect fit for any space.

SPECIFICATIONS	B36XTCE		B41XTCE	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	31,000	31,000	42,500	37,500
Turn down to (BTU)	21,500	25,000	30,000	29,500
Efficiency (steady state)	70.56%	71.08%	70.56%	71.08%
EnerGuide Rating (Canada only)	65.90%	65.90%	65.90%	65.90%

DIMENSIONS	B36XTCE	B41XTCE
Viewing Area	652 sq. in.	840 sq. in.
Width	40-5/8"	40-5/8"
Height	38-1/16"	36-3/8"
Depth	23-5/8"	25-9/16"



B41XTCE shown with old town red brick panels and integrated safety screen.

STANDARD FEATURES

- Natural gas
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame I GTMF remote control
- Electronic ignition with SureFire™ switch
- Top or rear vent for versatile installations
- Limited lifetime warranty

OPTIONS

- Brick panels in a variety of colors and designs
- Inner reflective black enamel panels
- Ember upgrade kit
- Wall thermostat
- Variable speed blower
- Vertical or horizontal vent terminations
- AstroCap® venting system
- Propane conversion kit (B36XTCE only)

REGENCY PANORAMA® P36 • P36E • P36D

Medium Gas Fireplaces



P36 shown with Vignette faceplate in black, Vignette finishing trim, rustic brown brick panels and integrated safety screen.



Black Louvers and Herringbone brick panels



Vignette faceplate in Tuscan Sunset and Herringbone brick panels



Vignette faceplate in Platinum and rustic brown brick panels

VERSATILE STYLE

Available in slim or deep box designs, the P36 Panorama® offers versatile style and efficient performance. Ideal for family rooms, dens, or bedrooms, it provides reliable warmth and a cozy atmosphere. With its clean design and customizable features, the P36 is a perfect blend of comfort and elegance for any space in your home.

SPECIFICATIONS	P36		P36E		P36D	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	30,000	30,000	29,500	28,500	30,000	30,000
Turn down to (BTU)	15,500	15,500	19,500	22,000	15,500	15,500
Efficiency (steady state)	70.55%	70.55%	72.88%	74.40%	71.26%	71.26%
EnerGuide Rating (Canada only)	n/a	n/a	66.86%	67.44%	n/a	n/a

DIMENSIONS	
Viewing Area	451 sq. in.
Width	36"
Height	30-1/2"
Depth	P36/P36E - 12-3/4" P36D - 17-1/8"



P36 shown with Vignette faceplate in black, Vignette finishing trim, rustic brown brick panels and integrated safety screen.



Vignette Faceplate in Black, Vignette Door Inlay in Black and Herringbone brick panels



Vignette Faceplate in Black, Vignette Door Inlay in Black Chrome and rustic brown brick panels



Vignette Faceplate in Black, Vignette Door Inlay in Tuscan Sunset and Herringbone brick panels

STANDARD FEATURES

- Natural gas
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame GTMF remote control
- Electronic ignition (P36E)
- Standing Pilot (Direct spark ignition - P36/P36D, available in USA only)
- Limited lifetime warranty

OPTIONS

- Vignette surrounds in various colors
- Vignette door inlays
- Vignette finishing trim
- Brick panels in a variety of colors and designs
- Inner reflective black enamel panels
- Ember upgrade kit
- Black louvers & mesh guard
- Variable speed blower
- Wall thermostat
- Propane conversion kit
- Vertical or horizontal vent terminations
- Heat Wave™ power duct kit
- AstroCap® venting system

REGENCY PANORAMA® P33 • P33E • P33CE

Small Gas Fireplaces



P33 shown with Vignette faceplate in black, Vignette finishing trim, Vignette door inlay in black, rustic brown brick panels and integrated safety screen.



P33/P33E Black Louvers and Herringbone brick panels



P33/P33E - Vignette Faceplate in Tuscan Sunset and Herringbone brick panels



P33/P33E - Vignette Faceplate in Platinum and rustic brown brick panels

COMPACT DESIGN

The P33 Panorama® offers a true flush finish for an unobstructed view of its bold, dynamic flames—perfect for small to medium-sized spaces. This fireplace is a complete visual experience, featuring a hand-crafted ceramic log set and glowing embers. With its seamless design and radiant ambiance, the P33 becomes an inviting centerpiece in any room.

SPECIFICATIONS	P33		P33E		P33CE	
	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE	NATURAL GAS	PROPANE
Input (BTU)	20,000	19,500	20,000	19,500	20,000	19,500
Turn down to (BTU)	14,000	15,500	14,000	15,500	14,000	15,500
Efficiency (steady state)	72.57%	74.06%	68.28%	73.82%	68.28%	73.82%
EnerGuide Rating (Canada only)	n/a	n/a	66.49%	69.44%	66.49%	69.44%

DIMENSIONS	
Viewing Area	416 sq.in.
Width	33"
Height	P33/P33E - 29" P33CE - 29-1/4"
Depth	P33/P33E - 12-3/4" P33CE - 16"



P33CE shown with oak log set.



P33 - Vignette Faceplate in Black, Vignette Door Inlay in Black and rustic brown brick panels



P33CE - Oak log set and herringbone brick panels



P33CE - Birch log set and Inner black enamel reflective panels

STANDARD FEATURES

- Natural gas
- Safety screen
- Ceramic glass
- Log set with embers
- Fire grate
- Flame height adjustment control
- Proflame I GTMF remote control
- Direct spark ignition (P33, available in USA only)
- Electronic ignition (P33E/P33CE)
- 45° flue for versatile installations
- Limited lifetime warranty

OPTIONS

- Vignette surrounds in various colors (P33/P33E)
- Vignette door inlays (P33/P33E)
- Vignette finishing trim (P33/P33E)
- Black louvers (P33/P33E)
- Brick panels in various colors and designs
- Inner reflective black enamel panels
- Ember upgrade kit
- Wall thermostat
- Variable speed blower
- Vertical or horizontal vent terminations
- Propane conversion kit
- Heat Wave™ power duct kit
- AstroCap® venting system
- 3-sided finishing trim (when using black louvers - (P33/P33E))

REGENCY EXCALIBUR® P90E

Medium Gas Fireplace



P90E shown with herringbone brick panels and double door inlay with integrated safety screen.

TIMELESS ARCH DESIGN

The Regency Excalibur® P90E features a graceful arched design that frames radiant flames with timeless elegance. Its glowing embers and hand-crafted split logs create the look and feel of a real wood-burning fire. With over 40 customization options, you can tailor every detail to match your style—making the P90E a truly personal and luxurious fireplace experience.

STANDARD FEATURES

- Natural gas
- Ceramic glass
- Log set with embers
- Fire grate
- Black brick panel floor
- Variable speed blower
- Proflame II GTMF remote control
- Electronic Ignition
- Flame height adjustment control
- Limited lifetime warranty

OPTIONS

- Arch surround in black with integrated safety screen
- Brick panels in various colors and designs
- Double door inlay
- Wall thermostat
- Propane conversion kit
- Heat Wave™ power duct kit
- AstroCap® venting system
- Steel stud framing kit

SPECIFICATIONS	NATURAL GAS	PROPANE
Input (BTU)	35,000	31,500
Turn down to (BTU)	23,500	25,500
Efficiency (steady state)	76.07%	76.07%
EnerGuide Rating (Canada only)	71.36%	72.79%

DIMENSIONS	
Viewing Area	455 sq. in.
Width	37"
Height	29-1/4"
Depth	19-1/4"

FIREPLACE OPTIONS

MAXIMIZING COMFORT AND EFFICIENCY

Regency fireplaces deliver controllable heating solutions by combining the latest in radiant/convection heat technology and innovative features:


- Adjustable flame/heat control.
- Heat radiating ceramic glass.
- **Intelligent Ignition System** features fuel-saving intermittent pilot ignition (IPI), 7-day continuous pilot mode (CPI), and 5 second **Flame Failure Response Time (FFRT)** for more reliable startups - even in cold weather (Electronic Ignition Models Only).
- Power's Out, Heat's On. All Regency gas fireplaces operate without electricity. Enjoy peace of mind all winter long.
- Variable speed blower to maximize efficiency. Our **quiet blowers** increase the efficiency of your fireplace by pushing the heat produced by your fireplace forward and distributing it throughout the room.
- **Proflame GTMF Remote Controls**. A standard feature included with most traditional gas fireplaces, this user friendly programmable remote can be set to start your Regency fire at your desired room temperature and be easily adjusted with the touch of a button.

COOL WALL SYSTEM

Our patented Cool Wall System utilizes natural convection and innovative design to maintain cool wall surface temperatures without any loss in efficiency or need for fans or additional ducting. The fireplace draws in cooler air from floor level, heating and then distributing the air both in front of the fireplace and at ceiling level, enabling total flexibility in finishing materials and placement of televisions and artwork.




NO CHIMNEY? NO PROBLEM!

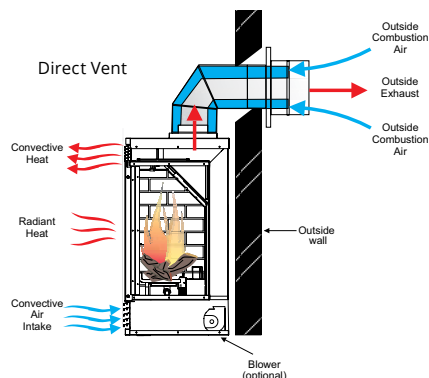

DIRECT VENT TECHNOLOGY allows you to add a fireplace to rooms with no existing chimney. Simply vent your fireplace through an outside wall and finish it with the patented **Regency AstroCap Flex Venting System**. Direct Vent fireplaces are airtight systems that use outside air for combustion, helping maintain indoor air quality and keeping all the warmth generated from your fireplace inside your home. Even when the fireplace is turned off, the sealed system will prevent cold air from entering the home and warm air from leaving. Direct Vent fireplaces allow versatility in **installation and increase fireplace efficiency**.

SPREAD THE WARMTH

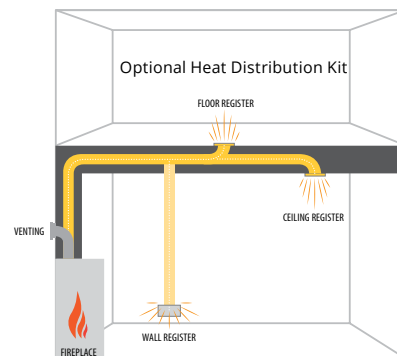

ZONE HEATING WITH REGENCY: Add a fireplace to your most frequently used living space and save energy by only heating rooms you use.

HEAT ADJACENT ROOMS WITH THE HEAT WAVE™ - POWER DUCT SYSTEM: Cut down on your heating costs using a Heat Wave kit. The Heat Wave system attaches onto most Regency gas fireplaces allowing you to direct heat into rooms up to 20 feet away. This kit comes complete with vent, variable speed blower (for Heat Wave system only) and vent register.

DESIGN OPTIONS

UNIT SIZE COMPARISON



P33CE



P33/P33E



P36/P36E/P36D



G600EC/G600C



G800EC/G800C



G800P



B36XTCE



B41XTCE



G1200P

DESIGN OPTIONS

INNER PANEL OPTIONS (NOT AVAILABLE ON ALL MODELS)



Herringbone -
Rustic Brown



Standard -
Rustic Brown



Standard -
Old Town Red



Standard - Charcoal



Black Enamel Panels



Ember Upgrade Package

VIGNETTE FACEPLATE OR LOUVERED OPTIONS


FOR UNITS: P33, P33E, P36, P36E, P36D

VIGNETTE FACEPLATES & DOOR INLAY



Shown with black Vignette Faceplate,
Tuscan Sunset Door Inlay & Vignette finishing trim

- ① Vignette Faceplate
- ② Vignette Inlay




VIGNETTE FACEPLATES & INLAYS FINISHES



Black



Black Chrome



Platinum
(Not available for inlays)



Tuscan Sunset

LOUVERS



Black Louvers
For units: P33/P33E/P36/P36E/P36D

ACCESSORY OPTIONS

GRANDVIEW UNITS (G1200P, G800P, G800EC, G800C, G600EC, G600C)

ACCESSORIES		G1200P ELECTRONIC IGNITION	G800P ELECTRONIC IGNITION	G800EC • G600EC ELECTRONIC IGNITION	G800C • G600C STANDING PILOT
Cool Wall Installation		★	★	★	★
Safety Screen		✓	✓	✓	✓
Ceramic Glass		✓	✓	✓	✓
Proflame II Remote Control		✓	✓	✓	•
On/Off Remote		•	•	•	★
Accent & Ember-bed Lights		✓	✓	✓	•
Inner Panels	Black	★	★	★	★
	Standard - Volcanic Black	★	★	★	★
	Standard - Rustic Brown	★	★	★	★
	Herringbone - Rustic Brown	★	★	★	★
	Herringbone - Black	★	★	★	★
	Black Enamel	•	★	★	★
	Black Glass	★	★	•	•
Faceplates	Black	•	★	★	★
	Brushed Nickel	•	★	★	★
	Antique Copper	•	★	★	★
Finishing Trims	Clean Front	★	★	★	★
	Outside Finish	•	•	★	★
Media	Driftwood Logs	★	★	★	★
	Birch Logs	★	★	★	★
	Oak Logs	★	★	★	★
	Crushed Glass (Various Colors)	•	•	★	★
Blower (with Fan Speed Control)		★	★	★	★
Outdoor Installation Kit		★	★	★	★
Power Vent Kit		★	★	★	★
WiFi Kit		★	★	•	•
Propane Conversion Kit		★	★	★	★

• Not available ✓ Standard ★ Optional

REMOTES & THERMOSTATS



Proflame I GTMF
Remote Control



Proflame II GTMF
Remote Control



Wall Mount



Programmable
Thermostat

FEATURE	DESCRIPTION	PROFLAME GTMF OR WALL MOUNT	PROGRAMMABLE THERMOSTAT
On/Off		✓	✓
Child lock		✓	•
LCD Backlit Screen		✓	✓
Clock		•	✓
Temperature display	°F / °C	✓	✓
	one setting (all days)	✓	✓
	5-day weekday & 2-day weekend	•	✓
Smart thermostat*		✓	•
Flame adjustment	(6 levels)	✓	•
Fan control**	(6 levels)	✓	•
Accent light (On/Off)***		✓	•

* Smart Thermostat - Rather than a thermostat that simply turns your fireplace on and off, the Smart Control function allows you to set your desired room temperature. As the room reaches your personal setting the flame intensity and heat will gradually decrease - keeping the ambience of your Regency fire on with less heat output with the option to turn off at any time.

** For models that have a blower. *** For models that have an optional accent light.

ACCESSORY OPTIONS

ACCESSORIES - AT A GLANCE			B41XTCE	B36XTCE	P90E	P36/ P36D	P36E	P33CE	P33E	P33
Clean front		Glass	✓	✓	•	•	•	✓	•	•
Faceplates	Vignette	Black	•	•	•	★	★	•	★	★
		Black Chrome	•	•	•	★	★	•	★	★
		Platinum	•	•	•	★	★	•	★	★
		Tuscan Sunset	•	•	•	★	★	•	★	★
	Vignette Door Inlay	Black	•	•	•	★	★	•	★	★
		Black Chrome	•	•	•	★	★	•	★	★
		Tuscan Sunset	•	•	•	★	★	•	★	★
Vignette Finishing trim		•	•	•	★	★	•	★	★	
Excalibur Arch Surrounds	Surround	Black	•	•	★	•	•	•	•	•
	Door Inlay	Black	•	•	★	•	•	•	•	•
Classic look	Louvers	Black	•	•	•	★	★	•	★	★
	Flush panels	Black	•	•	•	•	•	•	•	•
	Finishing Trim	Black	•	•	•	★	★	•	★	★
Inner panels	Bricks	Standard - Rustic Brown	★	★	★	★	★	★	★	★
		Standard - Old Town Red	★	★	★	★	★	★	★	★
		Standard - Charcoal	★	•	•	•	•	•	•	•
		Herringbone - Rustic Brown	•	•	★	★	★	★	★	★
	Reflective	Black enamel	★	★	•	★	★	★	★	★
Safety Screen (included with unit or faceplate)			✓	✓	✓	✓	✓	✓	✓	✓
Ember upgrade package			★	★	★	★	★	★	★	★
Blower (with fan speed controller)			★	★	✓	★	★	★	★	★
Controls	Programmable Thermostat		★	★	★	★	★	★	★	★
	Proflame GTMF Remote Control		✓	✓	✓	✓	✓	✓	✓	✓
Venting	Direct vent		✓	✓	✓	✓	✓	✓	✓	✓
	AstroCap® Venting System		★	★	★	★	★	★	★	★
	Heat Wave™ Power Duct System		•	•	★	★	★	★	★	★
Propane conversion kit			•	★	★	★	★	★	★	★

• Not available


✓ Standard

★ Optional

APP CONTROL

Put the power of flame directly in your hand. With the Proflame Connect Plus App, you can take control of your fireplace turning it on/off, adjusting the flame height, and temperature of your gas fireplace directly on your smartphone. The optional Wi-Fi enabled module provides the ultimate fireplace control.


*Available on select units.




SPECIFICATIONS

INSTALLATION OPTIONS - G1200P, G800P, G800EC, G800C

Non-Combustible Finishing Install




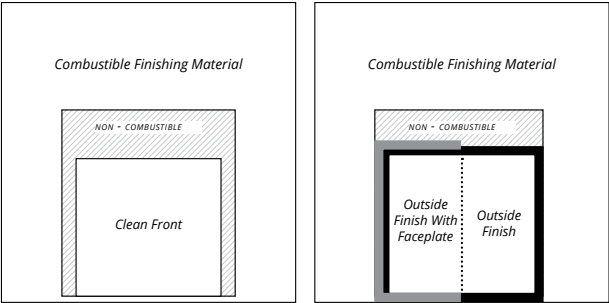


Combustible Finishing Install with Cool Wall

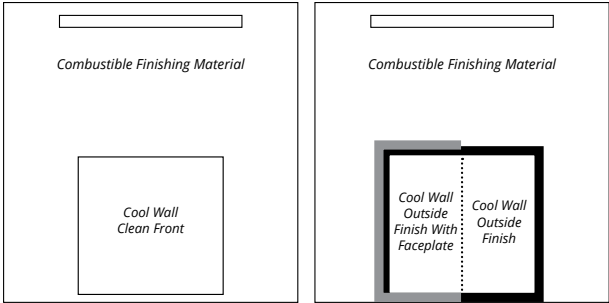

OPTIONS	G800EC	G800C	G800P	G1200P
Cool Wall Option	Optional	Optional	Optional	Optional
Min. Cool Wall Opening	66 sq. in.	66 sq. in.	107 sq. in.	180 sq. in.
Min. Enclosure Ceiling	80" Cool Wall or 62" non-Cool Wall	80" Cool Wall or 62" non-Cool Wall	72" Cool Wall or 62" non-Cool Wall	88" Cool Wall or 96" non-Cool Wall

DIMENSIONS - G1200P

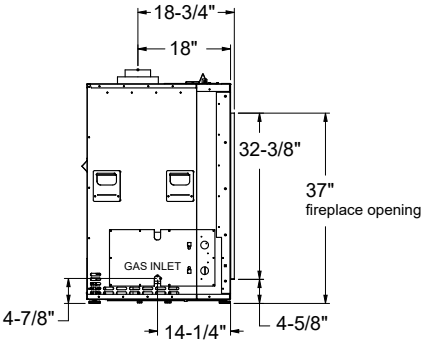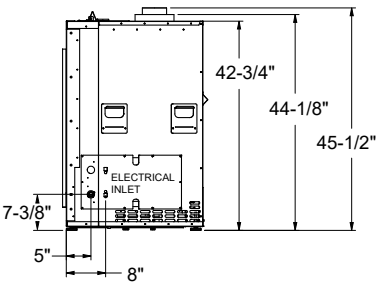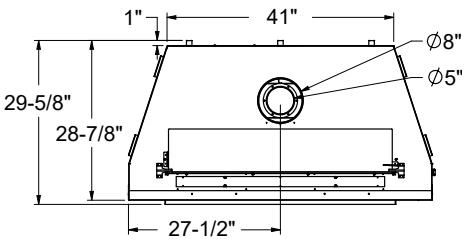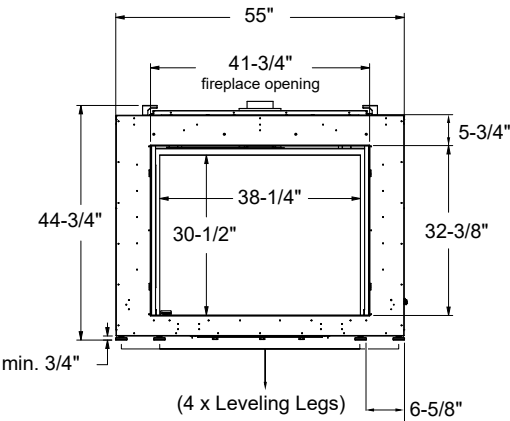


For installation, framing and clearances see manuals on our website: www.regency-fire.com


NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS


DIMENSIONS - G800P

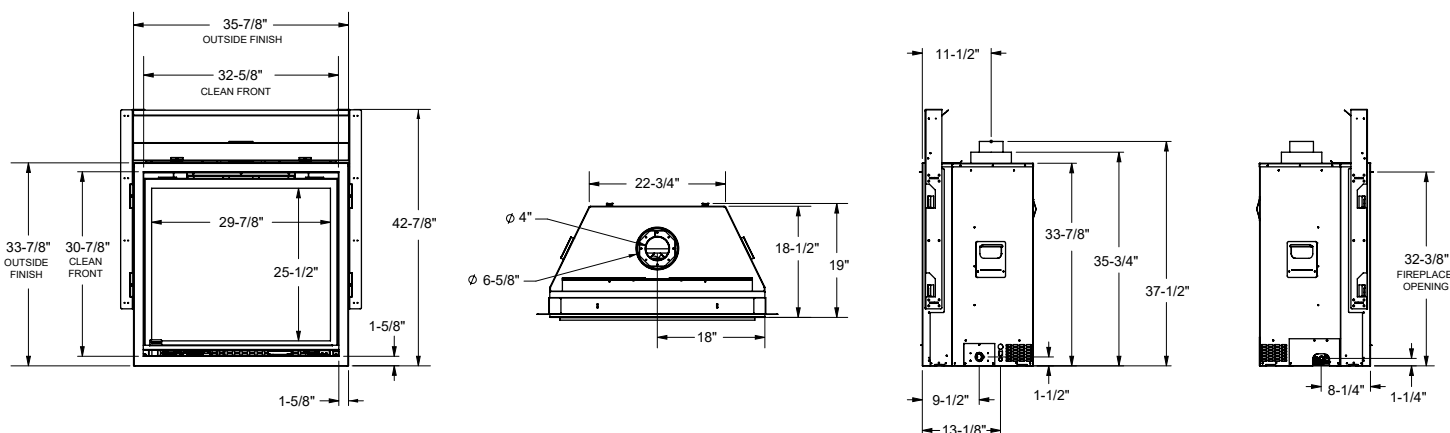

DIMENSIONS - G800EC, G800C

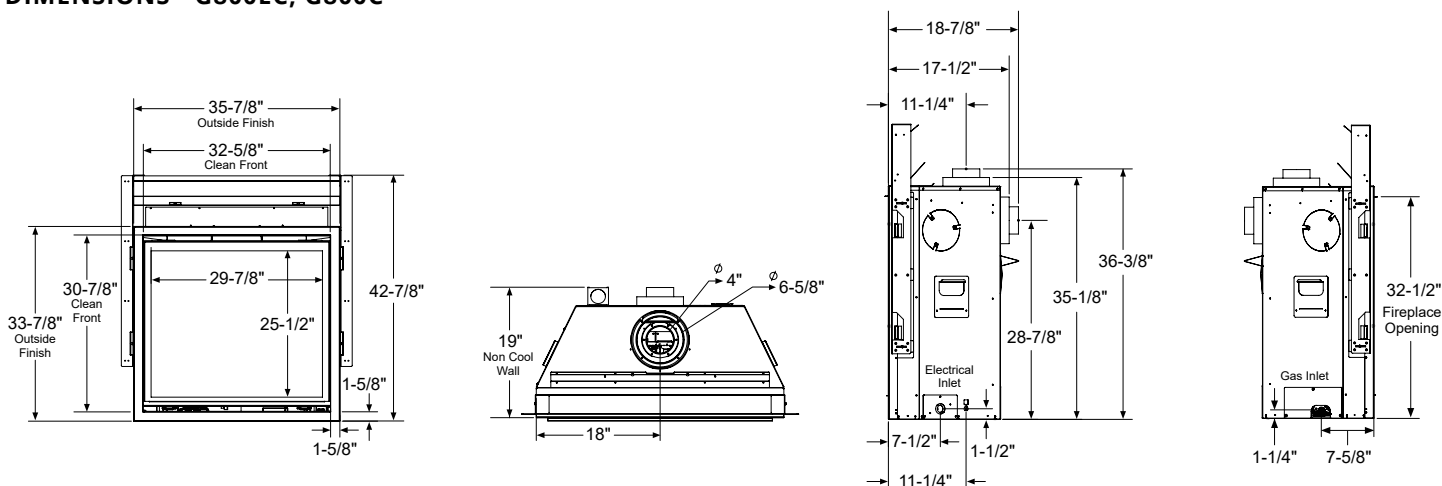

DIMENSIONS - G600EC, G600C

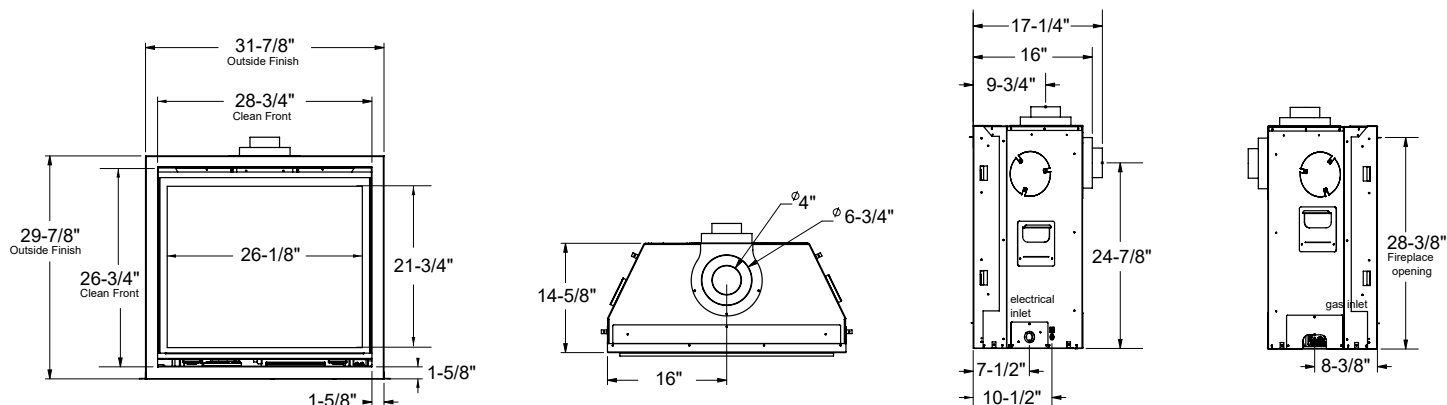


For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

FRAMING - G1200P

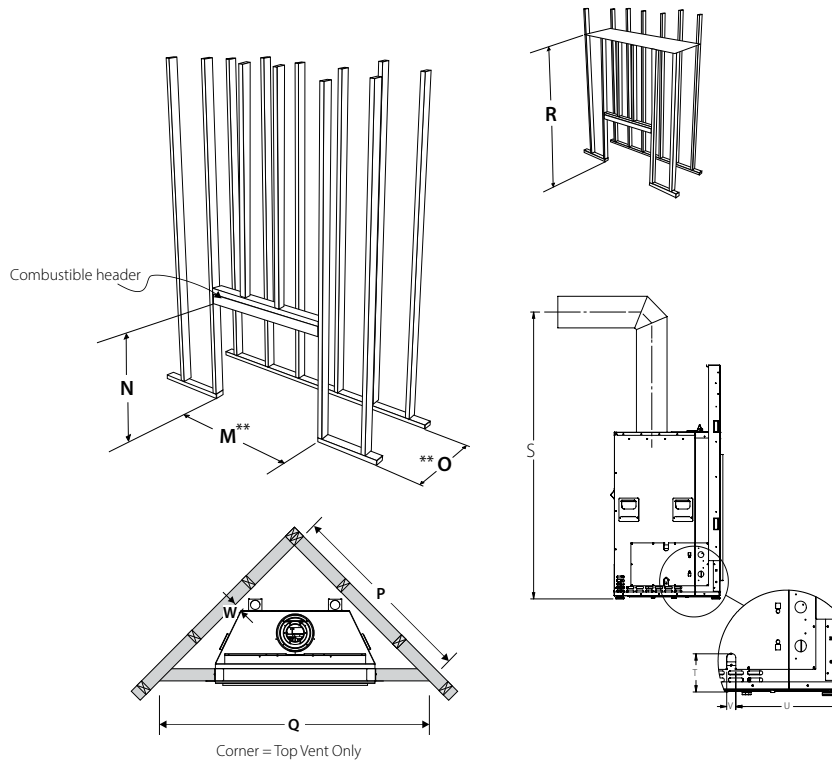

**The framing depth/width does not take into account dry wall/wood or similar materials against the back /side wall.
The framing depth will need to change based on the thickness of the material
(example: M - 57-1/4"/1454 mm framing width + 1/2" drywall x 2 Both Sides = 58-1/4"/1479 mm)
(example: O - 29"/737 mm framing depth + 1/2" drywall = 29-1/2"/749 mm)

FRAMING - G1200P

FRAMING		COOL WALL CLEAN FRONT	NON COOL WALL CLEAN FRONT
M	Framing Width	57-1/4"	57-1/4"
N*	Framing Height	51-1/4"	60-1/4"
O	Framing Depth	29"	29"
P	Corner Facing Wall Width	70-1/2"	70-1/2"
Q	Corner Facing Wall Width	99-3/4"	99-3/4"
R	Framed Chase Ceiling Enclosure	88"	96"
S	Vent Centerline Height - Top	75-1/2"	75-1/2"
T	Gas Connection Height	4-7/8"	4-7/8"
U	Gas Connection Inset	13-3/4"	13-3/4"
V	Gas Connection Width	1-1/4"	1-1/4"
W	Clearance to Corner of Unit	1"	1"


* Important: Framing height requires consideration of the hearth depth.
Dimension N = N + the thickness of the installed hearth.

OPTIONS	G1200P
Cool Wall Option	Optional
Min. Cool Wall Opening	180 sq. in.
Min. Enclosure Ceiling	88" Cool Wall or 96" non-Cool Wall

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

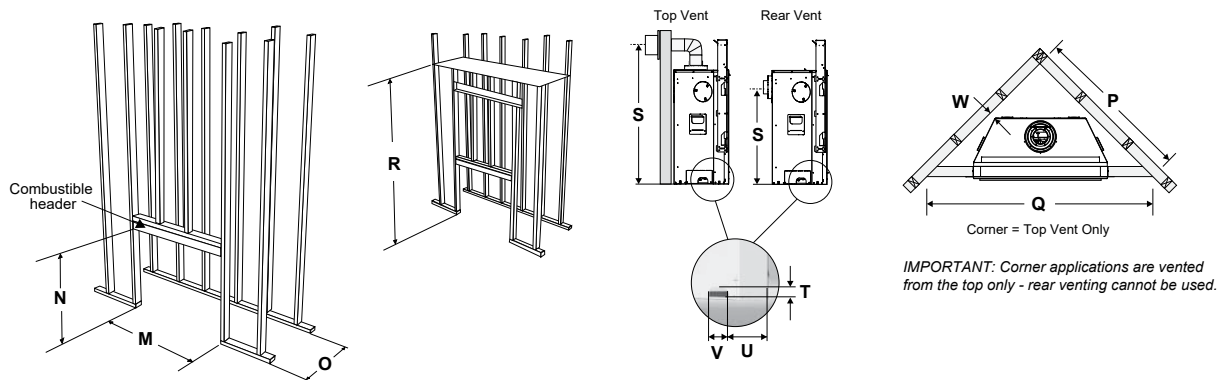

FRAMING - G800P

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	37-1/2"	37-1/2"	37-1/2"
N*	Framing Height	43"	49-1/4"	49-1/4"
O	Framing Depth	19"	20"	20"
P	Corner Facing Wall Width	43"	44-3/8"	44-3/8"
Q	Corner Facing Wall Width	60-7/8"	62-7/8"	62-7/8"
R	Framed Chase Ceiling Enclosure	72"	62"	62"
S	Vent Centerline Height - Top	44-1/2"	44-1/2"	44-1/2"
T	Gas Connection Height	1-1/2"	1-1/2"	1-1/2"
U	Gas Connection Inset	6-3/8"	6-3/8"	6-3/8"
V	Gas Connection Width	3"	3"	3"
W	Clearance to Corner of Unit	1-1/2"	1"	1"
Non-combustible Material Required Above Appliance		Not Required	17-1/2"	16"

* Important: Framing height requires consideration of the hearth depth. Dimension N = N + the thickness of the installed hearth.

FRAMING - G800EC, G800C

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	36-1/2"	37-1/2"	36-1/2"
N*	Framing Height	43"	43"	43"
O	Framing Depth	16-7/8"	19-1/4"***	19-1/4"***
P	Corner Facing Wall Width	42-1/2"	61-1/4"***	46-1/2"***
Q	Corner Facing Wall Width	60"	86-5/8"	65-3/4"
R	Framed Chase Ceiling Enclosure	80"	62"	62"
S	Vent Centerline Height - Rear	29"	29"	29"
S	Vent Centerline Height - Top	44"	44"	44"
T	Gas Connection Height	1-1/2"	1-1/2"	1-1/2"
U	Gas Connection Inset	6-3/8"	6-3/8"	6-3/8"
V	Gas Connection Width	3"	3"	3"
W	Clearance to Corner of Unit	2-3/4"	2-3/4"	2-3/4"
Non-combustible Material Required Above Appliance		Not Required	11-1/2"	10"

* Important: Framing height requires consideration of the hearth depth.
Dimension N = N + the thickness of the installed hearth.


*** Top Vent Only

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

FRAMING - G600EC, G600C

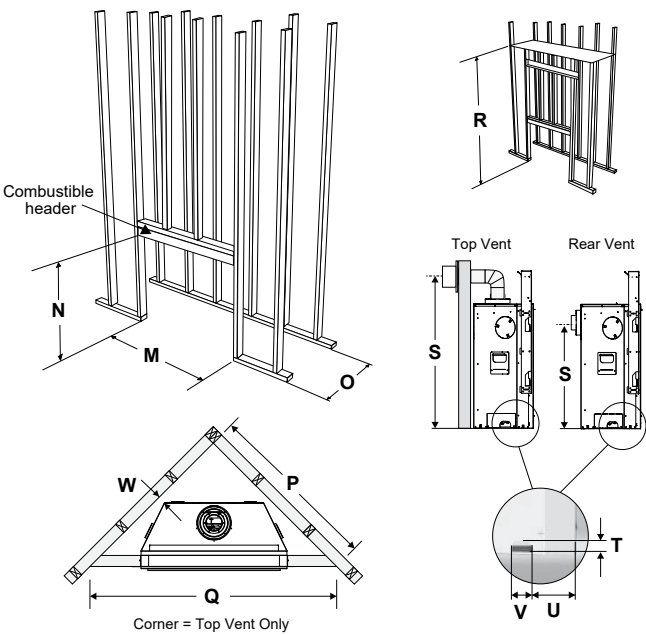


IMPORTANT: Corner applications are vented from the top only - rear venting cannot be used.

FRAMING		COOL WALL	CLEAN FRONT	OUTSIDE FINISH
M	Framing Width	33"	33-1/2"	33-1/2"
N*	Framing Height	40"	40"	40"
O	Framing Depth	15"	16-3/4"	16-3/4"
P	Corner Facing Wall Width	37-1/4"	40"	40"
Q	Corner Facing Wall Width	52-1/2"	57"	57"
R	Framed Chase Ceiling Enclosure - Rear	74-1/2"	43-1/2"	43-1/2"
R	Framed Chase Ceiling Enclosure - Top	74-1/2"	60"	60"
S	Vent Centerline Height - Rear	24-7/8"	24-7/8"	24-7/8"
S	Vent Centerline Height - Top	40"	40"	40"
T	Gas Connection Height	1-7/8"	1-7/8"	1-7/8"
U	Gas Connection Inset	8-3/8"	8-3/8"	8-3/8"
V	Gas Connection Width	3-1/2"	3-1/2"	3-1/2"
W	Clearance to Corner of Unit	1/2"	2"	2"
	Non-combustible Material Required Above Appliance	no	yes	yes

* Important: Framing height requires consideration of the hearth depth.
Dimension N = N + the thickness of the installed hearth.

** Top Vent Only

EXCALIBUR P90E

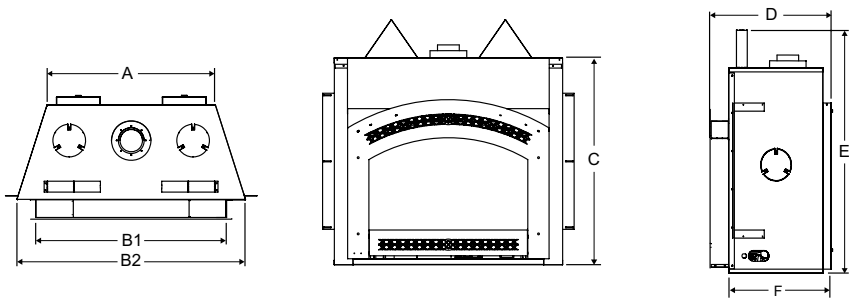

	P90E
A	31"
B1	35-1/8"
B2	42"
C	38"
D*	22-1/2"
E	45"
F	19-1/8"

* Without faceplate




For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

PANORAMA DIRECT VENT FIREPLACES




**P36D
P36E
P36**






	P36D	P36E/ P36	P33E/ P33	P33CE
A	33-1/16"	33-1/8"	23"	23"
B	36-1/16"	36-1/16"	33"	34-9/16"
C	30-1/2"	14-3/4"	14-1/2"	29-1/4"
D*	19-1/8"	15"	14-3/4"	--
E	36"	36"	31-1/2"	31-3/4"
F	17-1/8"	12-3/4"	12-3/4"	16"
G	--	--	--	29-7/16"
H	--	--	--	21-3/8"

* Includes Vignette faceplate
See manual for Vignette finishing trim dimensions


**P33
P33E**



P33CE



P33CE

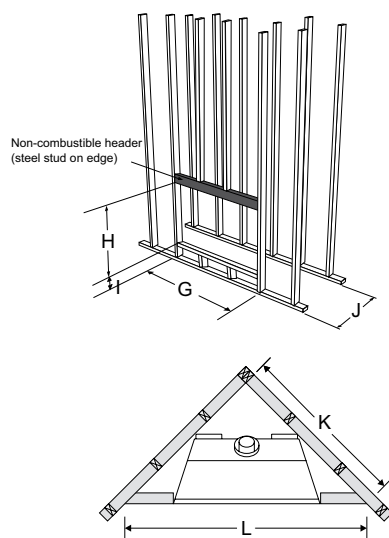


FRAMING	P33CE WITH NON-COMBUSTIBLE BOARD ONLY	P33CE WITH TILE, STONE, BRICK, SLATE, VERONA SURROUND OR OTHER NON-COMBUSTIBLE FINISH
G	35"	35"
H	31-3/4"	31-3/4"
I	0" (when not using a surround)	0" 3-5/16" min (w/ verona surround)
J	23-1/4" Vertical Rise 20-1/4" Rigid 16-1/2" Flex	22-3/4" Vertical Rise 19-3/4" Rigid 16" Flex
K	39-1/4"	38-15/16"
L	55-1/2"	54-1/2"

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.


SPECIFICATIONS

BELLAVISTA DIRECT VENT FIREPLACES

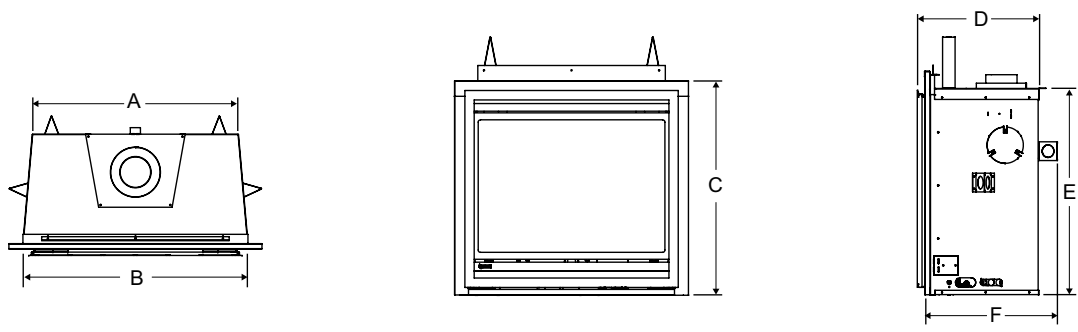

UNITS	A	B	C	D*	E	F	G	H
B41XTCE	38-3/8"	46-11/16"	44-1/4"	--	49-1/2"	26-3/16"	38-7/16"	29-1/8"
B36XTCE	33-1/16"	40-5/8"	38-1/16"	--	41-5/16"	23-5/8"	32-7/8"	25-5/8"

* Includes Vignette Faceplate

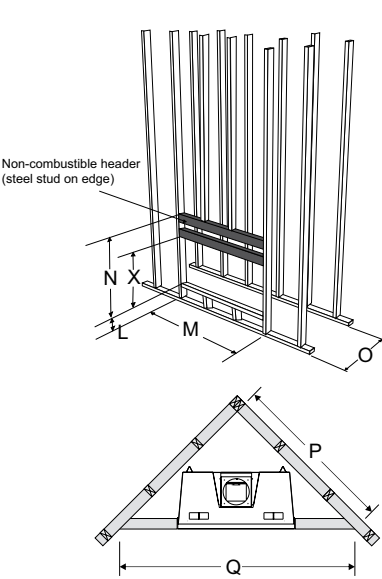


FRAMING	B36XTCE
L	0"
M	41-1/4"
N	46-3/4"
O (Rear Vent)	23-7/8"
O (Top Vent)	23-7/8"
P (Rear Vent)	57-7/8" AstroCapXL 66-1/8" other approved caps
P (Top Vent)	53-1/4"
Q (Rear Vent)	81-1/2" AstroCapXL 93-1/2" other approved caps
Q (Top Vent)	75-1/4"
X	41" (Optional steel stud)

FRAMING	B41XTCE
M	47-1/4"
N	49-1/2"
O (Rear Vent)	26-1/2"
O (Top Vent)	25-7/8"
P	65-1/4"
Q	91-11/16"

For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.

SPECIFICATIONS

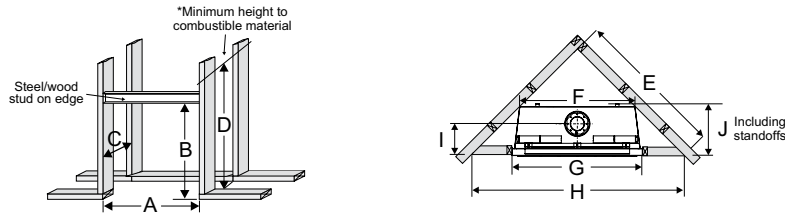

P36/P36E/P36D

INSTALLATION	UNITS	A	B	C	D*	E	F	G	H	I	J
Framing with Vignette Faceplate Stepped Finish	P36/P36E	36-1/4"	40-3/4"	12-3/4"	46"	42-7/16"	33-1/4"	36-1/4"	60"	7-1/4"	12-3/4"
	P36D	36-1/4"	40-3/4"	17-3/8"	46"	48"	33-1/4"	36-1/4"	68"	11-1/4"	17-1/8"
Framing with Vignette Faceplate & Finishing Trim Finished Flush	P36/P36E	38"	41-5/8"	14-3/4"	46"	43-11/16"	33-1/4"	38"	61-13/16"	9-1/4"	14-3/4"
	P36D	38"	41-5/8"	19-3/8"	46"	50-9/16"	33-1/4"	38"	71-9/16"	13-1/4"	-
Framing with Louvers and safety screen	P36/P36E	36-1/4"	36-1/4"	12-3/4"	46"	42-7/16"	33-1/4"	36-1/4"	60"	7-1/4"	12-3/4"
	P36D	36-1/4"	37-1/4"	17-3/8"	46"	48"	33-1/4"	36-1/4"	68"	11-1/4"	17-1/8"

* 'D' is minimum height to combustible materials including the minimum 2" top clearance to the horizontal vent.

P90E


INSTALLATION	UNIT	A	B	C	D	E	F	G	H	I	J
Framing and Finishing	P90E	46-1/2"	45-1/4" 46-3/8"*	21-1/2"	53-3/4"	51-1/8"	31"	46-1/2"	72-1/4"	13-11/16"	19-1/4"

* If raised 1-1/8" using base standoffs.

P33/P33E


VERTICAL TERMINATION OR VERTICAL RISE WITH HORIZONTAL TERMINATION
Vignette and Vignette Finishing Trim - Finished Flush

For Both Rigid & Flex

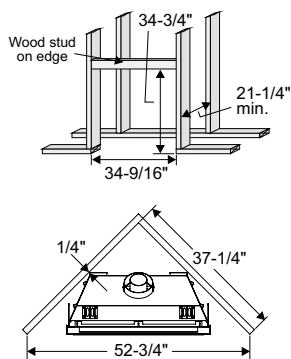


VERTICAL TERMINATION OR VERTICAL RISE WITH HORIZONTAL TERMINATION
Vignette and Vignette Finishing Trim Stepped Finish or Safety Screen and Louvers

For Both Rigid & Flex




REAR TERMINATION
Vignette and Vignette Finishing Trim - Finished Flush


For Rigid Vent



For Flex Vent




For Both Rigid & Flex




REAR TERMINATION
Vignette and Vignette Finishing Trim Stepped Finish or Safety Screen and Louvers


For Rigid Vent



For Flex Vent



For Both Rigid & Flex




For installation, framing and clearances see manuals on our website: www.regency-fire.com

NOTE: All product specifications are subject to change without notice. Before installing refer to the relevant product manual for full and up-to-date information.



Find More Products at **REGENCY-FIRE.COM**



©2026 FPI Fireplace Products International Ltd. Regency®, Panorama®, Excalibur®, Bellavista®, SureFire®, Heat Wave™, Heat Release™, and AstroCap® are registered or proprietary trademarks of FPI Fireplace Products International Ltd.

All rights reserved.

Printed in Canada (06/26)

Part No. 944-227

Your Regency Dealer