


Plateau Series Outdoor Decorative Fireplace

Unit Dimensions: PTO30CFT

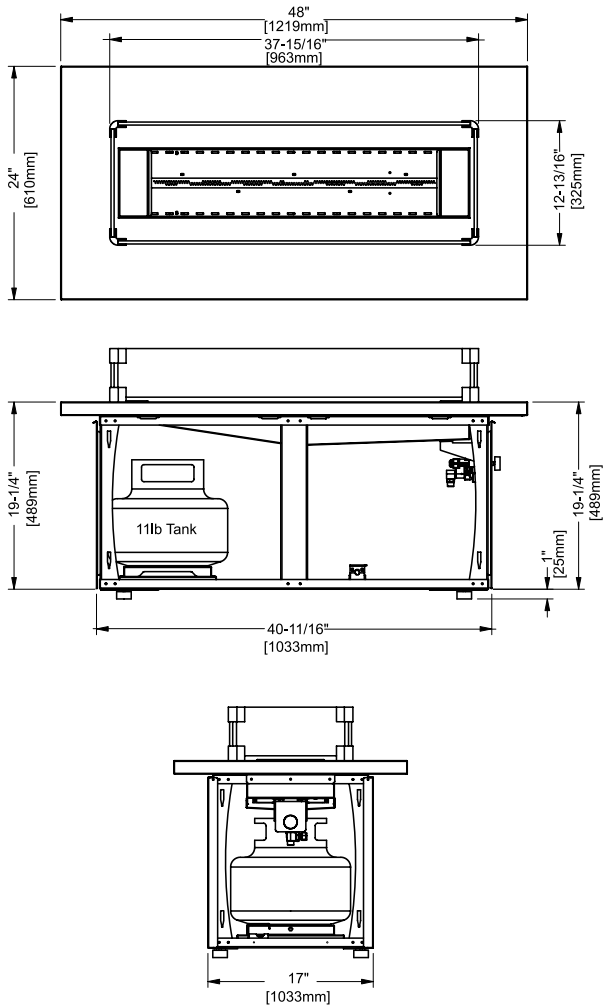

Model	Plateau Series-NG2	Plateau Series-LP2
Fuel Type	Natural Gas	Propane Gas
Minimum Supply Pressure	5" W.C. (1.25 kPa)	12" W.C. (2.99 kPa)
Manifold Pressure - High	3.5" W.C. (0.87 kPa)	11" W.C. (2.73 kPa)
Manifold Pressure - Low	0.5" W.C. (0.12 kPa)	1" W.C. (0.25 kPa)
Orifice Size	#23 DMS	#45 DMS
Minimum Input Altitude 0-4500 ft.	18,000 Btu/h (5.27 kW)	15,000 Btu/h (4.39 kW)
Maximum Input Altitude 0-4500 ft.	49,000 Btu/h (14.36 kW)	48,000 Btu/h (14.06 kW)
Vent Sizing	No Vent	No Vent

Plateau Series Outdoor Decorative Gas Fireplace

MINIMUM CLEARANCES TO COMBUSTIBLES

The clearances listed below are Minimum distances unless otherwise stated:

A major cause of fires is failure to maintain required clearances (air space) to combustible materials. It is of the greatest importance that this decorative gas appliance be installed only in accordance with these instructions.

Caution Requirements

The top, back and sides of the decorative gas appliance are defined by standoffs. The metal ends of the standoff may **NOT** be recessed into combustible construction.

WARNING

Fire hazard is an extreme risk if these clearances (air space) to combustible materials are not adhered to. It is of greatest importance that this decorative gas appliance be installed only in accordance with these instructions.

Plateau Series Clearance Requirements

Clearance:	Dimension	Measured From:
A: Back wall	17" (432mm)	Burner to back wall
B: Sidewall	17" (432mm)	Burner to sidewall
C: Ceiling	45" (1143mm)	Burner to Ceiling
D¹: Floor	0" When using supplied leveling legs or optional casters.	
D²: Floor	1"(25mm)	Unit Base to Floor
E: Alcove Width	84"(2134mm)	Wall to Wall (Minimum)
F: Alcove Depth	60" (1524mm)	Front to Back Wall (Maximum)
Notes:	0"	No Hearth Required

